


A GUIDE TO FLEXIBLE LEDS

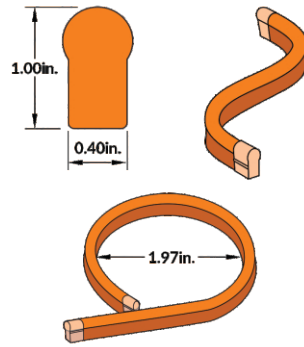

LUMIFLEX


Simulated neon with a side-to-side bend

BEST FOR: Signage lighting, outdoor/indoor decoration lighting, contour application, channel letters

COLORS AVAILABLE:



White 3000K | White 4000K | White 6500K | Red | Orange Golden Rod | Green | Blue

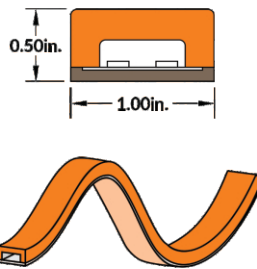

LUMISTRAP



A top to bottom bend with an eye-catching brightness

BEST FOR: Shelf lighting, cove and under counter lighting, exterior accent/border lighting

COLORS AVAILABLE:



White 2700K | White 3000K | White 4000K | White 5000K | White 6500K | Red | Green | Blue

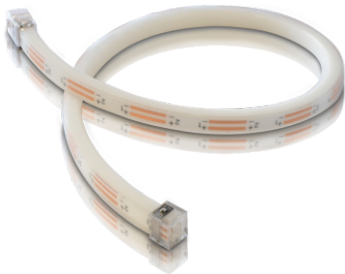

LUMILINE


A thinner profile of the LumiStrap

BEST FOR: Neon tube light source, freezer and cooler lighting, building and sign outline lighting, bathroom, general and cove lighting

COLORS AVAILABLE:



White 2700K | White 4000K | White 5700K | White 6500K | Red | Green | Blue

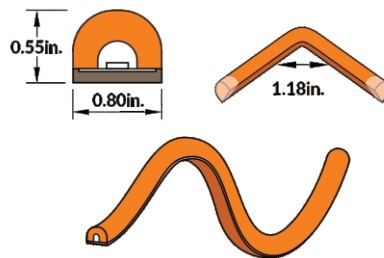

LUMICURVE

A more flexible version of the LumiStrap

BEST FOR: Architecture lighting, outdoor/indoor decoration lighting, corners, columns, arches,

**perfect for corners*

COLORS AVAILABLE:



White 3000K | White 4000K | White 6500K | Red | Orange Golden Rod | Green | Blue

	LumiFlex	LumiStrap	LumiLine	LumiCurve
Input	100-240 VAC	100-240 VAC	100-240 VAC	100-240 VAC
Output	24 VDC	24 VDC	24 VDC	24 VDC
Max. Load Footage	49 ft.	32 ft.	32 ft.	49 ft.
Watts per Foot	3.10	7.60	3.70	2.60
Dimming Capable	Yes	Yes	Yes	Yes
Bending Parameters	1.97in.	4.70in.	3.93in.	1.18in.
Limited Warranty Terms	5 Years	5 Years	5 Years	5 Years
Materials	Silicone	Silicone	Silicone	Silicone
Dimensions	1.00 x 0.40	0.50 x 1.00	0.55 x 0.63	0.55 x 0.80
Certification	cULus E335482, CE	cURus	cURus	cULus E335482, CE